

## One Door Glass Chiller

**Range:** BackBar

**SKOPE ID:** GC001

**Dimensions:** 970 mm (W) × 590 mm (D) × 870 mm (H)\*

**Capacity:** 152 L

\* Height with legs is adjustable from 855 to 890.

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A 1-door under-bar glass chiller designed to keep your bar glasses cool and easily accessible to service staff in busy bars, clubs, and hotels. With a sleek aesthetic, including frameless glass doors, you can create an integrated look for all undercounter glass door bar refrigeration alongside SKOPE's BackBar range. The body is made from powder-coated, galvanised steel with colour options; it can also be upgraded to full stainless steel construction. The cabinet features wire shelving that can accommodate glass racks at either 355 mm × 430 mm, or 430 mm × 430 mm, for keeping your glasses chilled. The glass doors are designed for condensation protection in standard operating environments via the double-glazed, argon-filled, low-e, insulated panels. The glass chiller uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output, with a remote version also available. The slim side-mounted and front-breathing refrigeration system wastes the absolute minimum of your precious floor space, while the fully removable refrigeration cartridge can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**



**Natural Refrigerant**

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: [skope@skope.com](mailto:skope@skope.com)

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

[skope.com](http://skope.com)



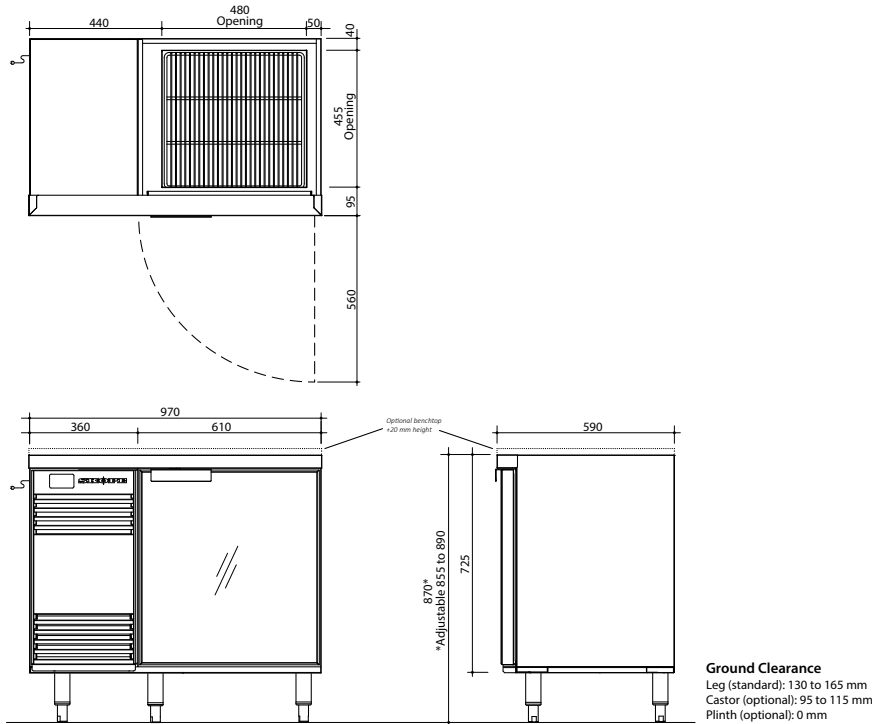

### Cabinet

<b>Type</b>	Glass Chiller		
<b>Finish</b>	Powder-coated galvanised steel or stainless steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	565
		Width (mm)	470
<b>Top Opening</b>	Depth (mm)	455	
	Width (mm)	480	
	Three plastic-coated wire shelves		
<b>Shelving</b>	2 × adjustable height shelf (465W × 455D), 1 × fixed bottom shelf (465W × 455D)		
<b>Lighting</b>	Sign	n.a.	
	Interior	n.a.	
<b>Night Lid</b>	Perspex		

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	970	480	TBC
<b>Depth (mm)</b>	590	485	TBC
<b>855 to 890 (standard legs)</b>			
<b>Height (mm)</b>	725 (plinth)	655	TBC
	820 to 840 (castors)		
<b>Weight (kg)</b>	130		TBC
<b>Capacity (L)</b>	152		
<b>Footprint (m<sup>2</sup>)</b>	0.57		

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

### Performance

<b>Temperature Range (°C)</b>	1 to 4		
<b>Maximum Ambient Temperature (°C)</b>	40		
<b>Sound Level (dB(A))</b>	Standard		<66

### Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply		
<b>Cord</b>	TBC m power cord with 3-pin, 10 amp plug		
<b>Current draw (A)</b>	2.6		

### Refrigeration

<b>Controller</b>	SCS Connect		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	24		
<b>Refrigerant/Charge</b>	R290/81 g		
<b>Nominal Capacity (W)</b>	550 (EN12900 MBP)		
<b>Heat Rejection (W)</b>	Average 55	Peak	80
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		



GC.1.GSW  
on the SKOPE website

