

800 SERIES GAS GRIDDLE PLATES

GPGDB48-X



Standard features and benefits

- · Heavy duty welded stainless steel body for rigidity and durability
- Fully welded surrounds
- 20 MJ griddle burners per every 305mm section
- 20mm thick mild steel griddle plate
- · Piezo ignition
- Constant pilot flame, maximises operating and energy efficiency
- Pilot flame failure on burners
- Front grease trough, generous chute and catcher
- · Stainless steel fascia and sides, and drip trays for ease of cleaning
- · Large, heat resistant reinforced control knob with easy to view settings and high to low flame control
- Adjustable legs
- · Easy to service

Other options

- · Chrome or ribbed plates
- 120°C 280°C thermostatic control
- Bench mounted
- · Stand with undershelf
- · Cupboard stand


















v1_2024



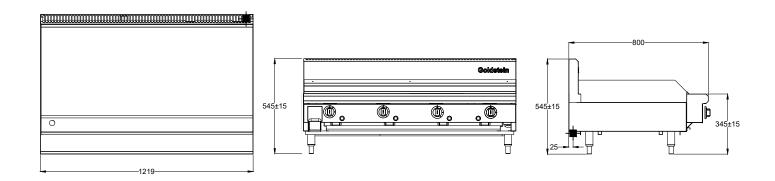





3/4" BSP Gas Connection

SPECIFICATIONS

Griddle size		1219 x 520 x 20 mm
(WxDxH)	on stand	1219 x 800 x 1120 mm
Dimensions	bench mounted	1219 x 800 x 545 mm

Available in Natural and LP gas

Gas connection	3/4" BSPM
Rating NG/LPG	80/80 MJ
Packed dimensions without stand	1280 x 900 x 870 mm

INSTALLATION CLEARANCES (minimum)

Combustible	Sides	50 mm
Material	Back	50 mm

Non-combustible	Sides	0 mm
Material	Back	0 mm

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



v1_2024